


ELECTRIC KETTLE BROCHURE

OEM&ODM


OUR CUSTOM CONTENT


- LOGO
- COLOR
- PACKAGING
- APPEARANCE
- POWER SUPPLY
- INSTRUCTION MANUAL

SINOPED (LIAONING) OPTRONIC TECHNOLOGY CO., LTD.

 | <https://appliancesmfr.com/>

 | sales@appliancesmfr.com

 | +86-13032484027

 | Room 401, Block D11, SISP., Hunnan District,
Shenyang City, Liaoning Province, China.

SINNEEN

PRODUCTS

ELECTRIC KETTLE PARAMETERS

ELECTRIC KETTLE

FOR A DAY'S WATER NEEDS

Convenient and fast, customized for the family





JS-101

Capacity 1.8L

Details

- * Voltage: AC 220V,50HZ,1500W
- * Craft:Plastic outer shell and steel
- * Different color available
- * 360 degree rotation base
- * Concealed heating element
- * Boil-dry protection system
- * Means(cm):84X42X48 Ctn: 20 PCS



Automatic shut Down



Avoid Overheating



Dry Boil Protection



360° Rotational Bsae



Stainless steel



Indicator light



Switch handle

Loading Qty

20'GP: 3460 PCS | 40'HQ: 8280 PCS



JS-102

Capacity 2.0L

Details

- * Voltage: AC 220V,50HZ,1500W
- * Craft:Plastic outer shell and steel
- * Different color available
- * 360 degree rotation base
- * Concealed heating element
- * Boil-dry protection system
- * Means(cm):68X41.8X47 Ctn: 16 PCS



Automatic shut Down



Avoid Overheating




Dry Boil Protection



360° Rotational Bsae



Stainless steel

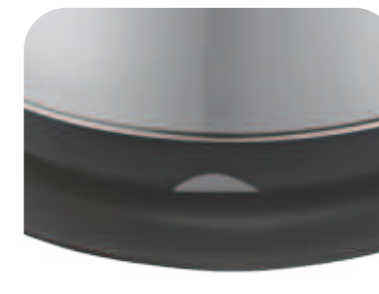

Indicator light



Switch handle

Loading Qty

20'GP: 3840 PCS | 40'HQ: 8640 PCS



JS-103

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):74X49.5X49
 Ctn: 24 PCS

➤ **Loading Qty**

20'GP: 3744 PCS | 40'HQ: 8640 PCS



JS-105

Capacity 1.5L/1.8L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):62.5X34X47.6
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3792 PCS | 40'HQ: 8760 PCS



JS-104

Capacity 3.5L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):68X42X55
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3248 PCS | 40'HQ: 7392 PCS



JS-106

Capacity 1.5L/1.8L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):62.5X34X47.6
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3792 PCS | 40'HQ: 8760 PCS



JS-107

Capacity 1.8L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):58.5X39.5X48.5
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3456 PCS | 40'HQ: 7920 PCS



JS-109

Capacity 2.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):62X34X48
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3780 PCS | 40'HQ: 8808 PCS



JS-108

Capacity 1.8L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):58.5X39.5X48.5
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3456 PCS | 40'HQ: 7920 PCS



JS-110

Capacity 1.8L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):58.5X39.5X48.5
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3456 PCS | 40'HQ: 7920 PCS



JS-111

Capacity 2.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):83X34.5X47.5
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3840 PCS | 40'HQ: 9752 PCS



JS-113

Capacity 1.0L/1.2L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):66X39X59
 Ctn: 24 PCS

➤ **Loading Qty**

20'GP: 5112 PCS | 40'HQ: 11664 PCS



JS-112

Capacity 4.0L/5.0L/6.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 4.0L means(cm):79.5X47X48.5 Ctn: 12 PCS
 5.0L means(cm):79.5X47X50.5 Ctn: 12 PCS
 6.0L means(cm):79.5X47X51.5 Ctn: 12 PCS

➤ **Loading Qty**

4.0L 20'GP: 2160 PCS | 40'HQ: 4740 PCS
 5.0L 20'GP: 2052 PCS | 40'HQ: 4620 PCS
 6.0L 20'GP: 2016 PCS | 40'HQ: 4644 PCS



JS-114

Capacity 1.0L/1.2L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):66X39X59
 Ctn: 24 PCS

➤ **Loading Qty**

20'GP: 5112 PCS | 40'HQ: 11664 PCS



JS-115

Capacity 1.5L/1.8L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):78X39X49
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3456 PCS | 40'HQ: 7872 PCS



JS-117

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):83X37X51.5
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 6216 PCS | 40'HQ: 7424 PCS



JS-116

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):66X37.5X48
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 4128 PCS | 40'HQ: 9792 PCS



JS-118

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):83X37X51.5
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP:6216 PCS | 40'HQ:7424 PCS



JS-119

Capacity 3.0L

▶ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):70X41.5X51.4
 Ctn: 16 PCS

▶ **Loading Qty**

20'GP: 3344 PCS | 40'HQ: 7904 PCS



JS-121

Capacity 1.7L

▶ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):81.5X36.5X41.5
 Ctn: 16 PCS

▶ **Loading Qty**

20'GP: 4000 PCS | 40'HQ: 9184 PCS



JS-120

Capacity 1.7L

▶ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):81X47X49
 Ctn: 16 PCS

▶ **Loading Qty**

20'GP: 2656 PCS | 40'HQ: 6240 PCS



JS-122

Capacity 1.2L

▶ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):83.5X42.5X38.5
 Ctn: 16 PCS

▶ **Loading Qty**

20'GP: 3600 PCS | 40'HQ: 8256 PCS

SINNEEN

PRODUCTS

ELECTRIC KETTLE PARAMETERS

ELECTRIC KETTLE

STARTING FROM BEAUTY BLU-RAY BOILING WATER



Convenient and fast, customized for the family



BL-101

Capacity 1.8L/2.0L

► Details

- * Voltage: AC 220V,50HZ,1500W
- * Pot guts:High borosilicate glass body
- * Craft:Inner blue LED light
- * Keep warm, temperature control, time setting
- * 360 degree rotation base
- * Concealed heating element
- * Boil-dry protection system
- * Means(cm):58.5X39.5X48.5 Ctn: 12 PCS



Automatic shut Down



Avoid Overheating



Dry Boil Protection



360° Rotational Base

► Loading Qty

20'GP: 3000 PCS | 40'HQ: 7320 PCS



BL-102

Capacity 1.8L/2.0L

► Details

- * Voltage: AC 220V,50HZ,1500W
- * Pot guts:High borosilicate glass body
- * Craft:Inner blue LED light
- * Keep warm, temperature control, time setting
- * 360 degree rotation base
- * Concealed heating element
- * Boil-dry protection system
- * Means(cm):58.5X39.5X48.5 Ctn: 12 PCS



Automatic shut Down



Avoid Overheating



Dry Boil Protection



360° Rotational Base

► Loading Qty

20'GP: 3000 PCS | 40'HQ: 7320 PCS



BL-103

Capacity 2.3L

► Details

- * Voltage: AC 220V,50HZ,1500W
- * Pot guts:High frequency glass
- * Polishing process:The outer layer of the pot body is PP plastic material
- * Single gold thermostat, automatic power off
- * 360 degree rotation base
- * Power cable:Copper-clad aluminum wire for power plug, wire exposed length 60cm
- * Means(cm):68X39.5X49.5 Ctn: 12 PCS



Automatic shut Down



Avoid Overheating



Dry Boil Protection



360° Rotational Base

► Loading Qty

20'GP: 2904 PCS | 40'HQ: 6696 PCS



BL-104

Capacity 1.8L/2.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):58.5X39.5X48.5
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3000 PCS | 40'HQ:7320 PCS



BL-106

Capacity 1.8L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):60X40.5X48.9
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3132 PCS | 40'HQ: 7344 PCS



BL-105

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):60X45.5X50
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 2700 PCS | 40'HQ: 6432 PCS



BL-107

Capacity 1.5L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):58.5X39.5X37.5
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 4464 PCS | 40'HQ: 10368 PCS



BL-108

Capacity 2.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):58.5X39.5X48.5
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3456 PCS | 40'HQ: 7920 PCS



BL-110

Capacity 2.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):60X40.5X48.9
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3132 PCS | 40'HQ: 7344 PCS



BL-109

Capacity 2.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):58.8X39.5X48.5
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3456 PCS | 40'HQ: 7920 PCS



BL-111

Capacity 1.8L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):58.5X39.5X48.5
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3456 PCS | 40'HQ: 7344 PCS



BL-112

Capacity 2.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):60X40.5X48.9
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3132 PCS | 40'HQ: 7344 PCS



BL-114

Capacity 2.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):74X49.5X49
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3132 PCS | 40'HQ: 7344 PCS



BL-113

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):58.5X39X57
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 2880 PCS | 40'HQ: 6864 PCS



BL-115

Capacity 1.8L/2.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):58.5X39.5X48.5
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3000 PCS | 40'HQ: 7320 PCS

SINNEEN

PRODUCTS

ELECTRIC KETTLE PARAMETERS

ELECTRIC KETTLE



**WORK ANYTIME
COOK AND DRINK**

Convenient and fast, customized for the family



BJ-101

Capacity 2.5L

► Details

- * Voltage: AC 220V,50HZ,1500W
- * Pot guts:High frequency glass
- * Polishing process:The outer layer of the pot body is PP plastic material
- * Single gold thermostat, automatic power off
- * 360 degree rotation base
- * Power cable:Copper-clad aluminum wire for power plug, wire exposed length 60cm
- * Means(cm):87.5X44.5X53 Ctn: 20 PCS



Automatic shut Down



Avoid Overheating



Dry Boil Protection



360° Rotational Base

► Loading Qty

20'GP: 3000 PCS | 40'HQ: 7060 PCS



BJ-102

Capacity 1.8L/2.0L

► Details

- * Voltage: AC 220V,50HZ,1500W
- * Craft:Plastic outer shell and steel
- * Different color available
- * 360 degree rotation base
- * Concealed heating element
- * Boil-dry protection system
- * Means(cm):62.5X34X47.6 Ctn: 12 PCS



Automatic shut Down



Avoid Overheating



Dry Boil Protection



360° Rotational Bsae

► Loading Qty

20'GP: 3960 PCS | 40'HQ: 9000 PCS



BJ-103

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):71.5X43.5X55.2
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 2880 PCS | 40'HQ: 6656 PCS



BJ-105

Capacity 3.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):70.8X43.5X57.5
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 2752 PCS | 40'HQ: 6432 PCS



BJ-104

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):90X43.5X48
 Ctn: 20 PCS

➤ **Loading Qty**

20'GP: 3220 PCS | 40'HQ: 7840 PCS



BJ-106

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):90X43.5X48
 Ctn: 20 PCS

➤ **Loading Qty**

20'GP: 3220 PCS | 40'HQ: 7840 PCS



BJ-107

Capacity 3.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):70.8X43.5X57.5
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 2752 PCS | 40'HQ: 6432 PCS



BJ-109

Capacity 3.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):70X39.5X57.2
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3168 PCS | 40'HQ: 7488 PCS



BJ-108

Capacity 0.8L

➤ **Details**

Voltage: AC 220V,50/HZ,600W
 Means(cm):68X45X37.2
 Ctn: 24 PCS

➤ **Loading Qty**

20'GP: 6576 PCS | 40'HQ:15192 PCS



BJ-110

Capacity 1.8L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):62.5X34X47.6
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3792 PCS | 40'HQ: 8760 PCS



BJ-111

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):77.5X37.5X47.5
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3712 PCS | 40'HQ: 8688 PCS



BJ-113

Capacity 3.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):83.5X37X54.8
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 2976 PCS | 40'HQ: 6736 PCS



BJ-112

Capacity 2.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):71.5X43.5X49.5
 Ctn: 20 PCS

➤ **Loading Qty**

20'GP: 3960 PCS | 40'HQ: 9420 PCS



BJ-114

Capacity 2.2L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):70X44X50.5
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3120 PCS | 40'HQ: 7568 PCS



BJ-115

Capacity 0.6L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):65X31.5X50
 Ctn: 24 PCS

➤ **Loading Qty**

20'GP: 4976 PCS | 40'HQ: 11280 PCS



BJ-117

Capacity 2.2L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):78X39.5X50
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3296 PCS | 40'HQ: 7776 PCS



BJ-116

Capacity 2.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):76X38.5X47
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3696 PCS | 40'HQ: 8720 PCS



BJ-201

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):69.5X43.5X49.6
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3312 PCS | 40'HQ: 7824 PCS



BJ-202

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):71.5X43.5X52.6
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3024 PCS | 40'HQ: 7072 PCS



BJ-204

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):71.5X43.5X52.6
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3024 PCS | 40'HQ: 7072 PCS



BJ-203

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):71.5X43.5X52.6
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3024 PCS | 40'HQ: 7072 PCS



BJ-205

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):71.5X43.5X49.5
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3024 PCS | 40'HQ: 7072 PCS



BJ-206

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):71.5X43.5X49.5
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3168 PCS | 40'HQ: 7536 PCS



BJ-208

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):71.5X43.5X49.5
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3168 PCS | 40'HQ: 7536 PCS



BJ-207

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):71.5X43.5X49.5
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3168 PCS | 40'HQ: 7536 PCS



BJ-209

Capacity 2.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):58.5X39X57
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 2880 PCS | 40'HQ: 6864 PCS



BJ-210

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):71.5X43.5X49.5
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3168 PCS | 40'HQ: 7536 PCS



BJ-212

Capacity 2.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):58.5X39X57
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3024 PCS | 40'HQ: 7072 PCS
 20'GP: 2880 PCS | 40'HQ: 6864 PCS



BJ-211

Capacity 2.2L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):70X44X50.5
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3120 PCS | 40'HQ: 7568 PCS



BJ-213

Capacity 0.8L

➤ **Details**

Voltage: AC 220V,50/HZ,900W
 Ctn: 24 PCS

➤ **Loading Qty**

20'GP: 6576 PCS | 40'HQ:15192 PCS



BJ-214

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):63.2X34X47.6
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3792 PCS | 40'HQ: 8760 PCS



BJ-216

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 2988 PCS | 40'HQ: 7416 PCS



BJ-215

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,600W
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 2988 PCS | 40'HQ: 7416 PCS



BJ-217

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):51.6X42.7X55
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 2988 PCS | 40'HQ: 7416 PCS



BJ-218

Capacity 1.8L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):58X39X49
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3456 PCS | 40'HQ: 7980 PCS



BJ-220

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):68X42X49
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3712 PCS | 40'HQ: 8336 PCS



BJ-219

Capacity 1.8L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):58X39X49
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3456 PCS | 40'HQ: 7980 PCS



BJ-221

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):83.5X34.5X47.5
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3808 PCS | 40'HQ: 8544 PCS



BJ-222

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):72X43X52.5
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3056 PCS | 40'HQ: 7216 PCS



BJ-224

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):71.5X43.5X52.6
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3024 PCS | 40'HQ: 7072 PCS



BJ-223

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,600W
 Means(cm):71.5X46.5X52.6
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3024 PCS | 40'HQ: 7072 PCS



BJ-225

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):71.5X43.5X52.6
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3024 PCS | 40'HQ: 7072 PCS



BJ-226

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):84.5X35X51
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3024 PCS | 40'HQ: 7072 PCS



BJ-228

Capacity 2.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):58.5X39X57
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 2880 PCS | 40'HQ: 6864 PCS



BJ-227

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,600W
 Means(cm):84.5X35X51
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3024 PCS | 40'HQ: 7072 PCS



BJ-229

Capacity 0.8L

➤ **Details**

Voltage: AC 220V,50/HZ,900W
 Ctn: 24 PCS

➤ **Loading Qty**

20'GP: 6576 PCS | 40'HQ:15192 PCS



BJ-230

Capacity 2.3L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):62.5X34X47.6
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3792 PCS | 40'HQ: 8760 PCS



BJ-232

Capacity 2.0L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3840 PCS | 40'HQ: 8640 PCS



BJ-231

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,600W
 Means(cm):68X43.2X48
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3488 PCS | 40'HQ: 8352 PCS



BJ-233

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):84.5X35X51
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3248 PCS | 40'HQ:7264 PCS



BJ-234

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,600W
 Means(cm):84.5X35X51
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3248 PCS | 40'HQ: 7264 PCS



BJ-236

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):84.5X35X51
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3248 PCS | 40'HQ: 7264 PCS



BJ-235

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):84.5X35X51
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3248 PCS | 40'HQ: 7264 PCS



BJ-237

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):84.5X35X51
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3248 PCS | 40'HQ: 7264 PCS



BJ-238

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,600W
 Means(cm):84.5X35X51
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3248 PCS | 40'HQ: 7264 PCS



BJ-240

Capacity 3.0L

➤ **Details**

Voltage: AC 220V,50/HZ,600W
 Means(cm):52.5X42.5X50.5
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3204 PCS | 40'HQ: 7704 PCS



BJ-239

Capacity 3.0L

➤ **Details**

Voltage: AC 220V,50/HZ,600W
 Means(cm):52.5X42.5X50.5
 Ctn: 12 PCS

➤ **Loading Qty**

20'GP: 3204 PCS | 40'HQ: 7704 PCS



BJ-241

Capacity 2.5L

➤ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):70X41.5X51.4
 Ctn: 16 PCS

➤ **Loading Qty**

20'GP: 3344 PCS | 40'HQ: 7904 PCS

SINNEEN

PRODUCTS

ELECTRIC KETTLE PARAMETERS

ELECTRIC KETTLE

HEALTHY DRINKING WATER



Convenient and fast, customized for the family



TS-101

Capacity 1.7L

▶ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):47.5X39.5X54
 Ctn: 8 PCS

▶ **Loading Qty**

20'GP: 2560 PCS | 40'HQ:5856 PCS



Comfort handle



Detachable lid



One button switch



Automatic shut Down



Avoid Overheating



Dry Boil Protection



360° Rotational Base



TS-102

Capacity 2.3L

▶ **Details**

Voltage: AC 220V,50/HZ,1500W
 Means(cm):63X44.5X44.5
 Ctn: 12 PCS

▶ **Loading Qty**

20'GP: 2916 PCS | 40'HQ: 7128 PCS



TS-103

Capacity 2.3L

▶ **Details**

Voltage: AC 220V,50/HZ,600W
 Means(cm):75.5X43.1X50.5
 Ctn: 16 PCS

▶ **Loading Qty**

20'GP: 2992 PCS | 40'HQ: 6960 PCS

SINREEN

THANKS

**ELECTRIC KETTLE
BROCHURE**

ELECTRIC KETTLE

**FOR A DAY'S
WATER NEEDS**

Convenient and fast, customized for the family

